



ANSI grooved flange one-piece (Flanged adapter)

ANSI grooved flange one-piece (Flanged adapter) is an integrated grooved connection flange that complies with the ANSI standard. It is used as an adapter to achieve grooved connection between the pipe and the flange

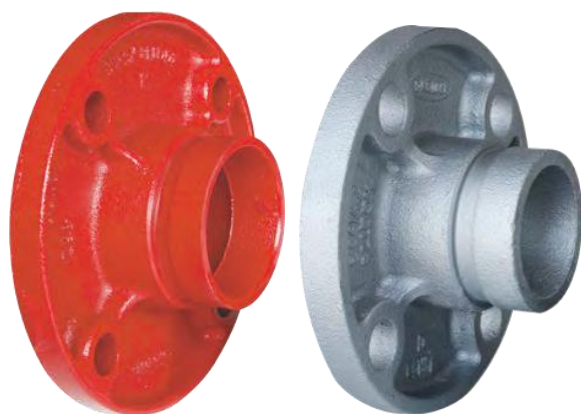

- **Standard:** ANSI / UL 213C UL / FM
- **Material:** Ductile iron ASTM A536, 65-45-12
- **Flanged end:** ANSI B16.1 Class 125, B16.42 Class 150, FF or RF
- **Rated pressure:** 300 psi
- **Surface:** Red painting / hot dip galvanized
- **Range:** 2" - 24"



Available size

Size			L	Bolting for mating flange		Flanged end connection
Inch	DN	mm	mm	PCD (mm)	Bolt	
2"	50	60.3	65	120.7	4 × 5/8"	Class 125 / 150
2-1/2"	65	73.0	65	139.7	4 × 5/8"	Class 125 / 150
3"	80	88.9	65	152.4	4 × 5/8"	Class 125 / 150
4"	100	114.3	70	190.5	8 × 5/8"	Class 125 / 150
6"	150	168.3	70	241.3	8 × 3/4"	Class 125 / 150
8"	200	219.1	80	298.5	8 × 3/4"	Class 125 / 150
10"	250	273.0	85	362.0	12 × 7/8"	Class 125 / 150
12"	300	323.8	90	431.8	12 × 7/8"	Class 125 / 150
14"	350	355.6	127	476.3	12 × 1"	Class 125 / 150
16"	400	406.4	127	539.8	16 × 1"	Class 125 / 150
24"	600	610.0	152	749.3	20 × 1-1/4"	Class 125 / 150

