


Quikcoup one bolt rigid grooved coupling

Quikcoup one bolt rigid grooved coupling is a type of pipe that uses a single bolt for fastening and is composed of ductile iron housing, sealing gaskets, etc. It achieves rigid pipe connection through grooved connection



- **Standard:** ANSI / UL 213 UL / FM
- **Material:** Ductile iron ASTM A536, 65-45-12
- **Bolt & nut:** Carbon steel
- **Gasket:** EPDM, nitrile, silicone rubber, etc
- **Rated pressure:** 300 - 500 psi
- **Surface:** Red painting / hot dip galvanized
- **Size range:** 1" - 6"

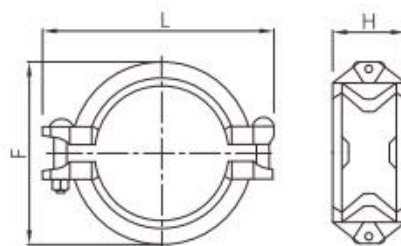

Available size

Size			Dimension (mm)			Bolting (n x bolt size)	
Inch	DN	mm	F	L	H	ANSI	EN
1"	25	33.7	57	99	48	1 - 3/8" × 55	1 - M10 × 55
1-1/4"	32	42.4	64	108	48	1 - 3/8" × 60	1 - M10 × 60
1-1/2"	40	48.3	70	114	48	1 - 3/8" × 60	1 - M10 × 60
2"	50	60.3	84	128	48	1 - 3/8" × 65	1 - M10 × 65
2-1/2"	65	73.0	96	140	48	1 - 3/8" × 70	1 - M10 × 70
2-1/2"	65	76.1	100	144	48	1 - 3/8" × 70	1 - M10 × 70
3"	80	88.9	114	168	48	1 - 1/2" × 80	1 - M12 × 80
4"	100	114.3	143	194	50	1 - 1/2" × 80	1 - M12 × 80
5"	125	139.7	172	228	50	1 - 1/2" × 85	1 - M12 × 85
5"	125	141.3	174	230	50	1 - 1/2" × 85	1 - M12 × 85
6"	150	165.1	198	256	51	1 - 1/2" × 90	1 - M12 × 90
6"	150	168.3	201	259	51	1 - 1/2" × 90	1 - M12 × 90