奥蓝德钢管
ALLLAND STEEL PIPE

Quick flexible grooved coupling

Quick flexible grooved coupling is a quick-installation type flexible pipe joint with a grooved connection structure, allowing for a certain relative displacement between pipes to compensate for deformation or absorb vibration

- **·Standard:** ANSI / UL 213 UL
- **·Material:** Ductile iron ASTM A536, 65-45-12
- **· Bolt & nut:** Carbon steel
- **· Gasket:** EPDM, nitrile, silicone rubber, etc
- **·Rated pressure:** 300 - 500 psi
- **·Surface:** Red painting / hot dip galvanized
- **·Size range:** 1-1/4" × 8"

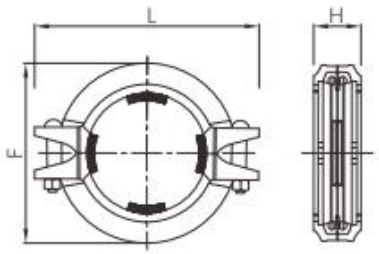

Available size

Size			Dimension (mm)			Bolting (n x bolt size)	
Inch	DN	mm	F	L	H	ANSI	EN
1-1/4"	32	42.4	65	108	47	2 - 3/8" × 60	2 - M10 × 57
1-1/2"	40	48.3	72	115	47	2 - 3/8" × 60	2 - M10 × 57
2"	50	60.3	85	126	48	2 - 3/8" × 60	2 - M10 × 57
2-1/2"	65	73	97	140	48	2 - 3/8" × 60	2 - M10 × 57
2-1/2"	65	76.1	100	140	48	2 - 3/8" × 60	2 - M10 × 57
3"	80	88.9	112	160	48	2 - 3/8" × 60	2 - M10 × 63
4"	100	114.3	138	194	50	2 - 1/2" × 65	2 - M12 × 70
5"	125	139.7	168	226	50	2 - 1/2" × 65	2 - M12 × 70
5"	125	141.3	170	228	50	2 - 1/2" × 65	2 - M12 × 70
6"	150	165.1	191	249	51	2 - 1/2" × 80	2 - M12 × 82
6"	150	168.3	198	257	51	2 - 1/2" × 80	2 - M12 × 82
8"	200	219.1	252	323	61	2 - 5/8" × 85	2 - M16 × 89