


Flanged reducing tee

Flanged reducing tee is a reducing tee fitting with flange connection structure. The three interface sizes are different, and the branch connection of pipelines of different diameters is achieved through flange connection.



- **Standard:** ANSI / UL 213C, EN 1092 ISO
- **Material:** Ductile iron
- **Flanged end:** EN 1092-2, PN10 / PN 16 / PN 25, RF or ANSI B16.1 Class 125, B16.42 Class 150, FF or RF
- **Rated pressure:** 300 - 500 psi
- **Surface:** Red or blue painting
- **Size range:** 3" - 24"

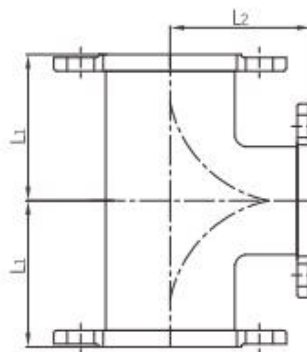

Available size

Size			Center to end (mm)	
Inch	DN	mm	L1	L2
4" × 3"	100 × 80	114.3 × 88.9	180	175
6" × 3"	150 × 80	165.1 × 88.9	220	205
6" × 4"	150 × 100	165.1 × 114.3	220	210
8" × 3"	200 × 80	219.1 × 88.9	260	235
8" × 4"	200 × 100	219.1 × 114.3	260	240
8" × 6"	200 × 150	219.1 × 165.1	260	250
10" × 4"	250 × 100	273.0 × 114.3	350	275
10" × 6"	250 × 150	273.0 × 165.1	350	300
10" × 8"	250 × 200	273.0 × 219.1	350	325
12" × 4"	300 × 100	323.9 × 114.3	400	300



Flanged reducing tee

Available size

Size			Center to end (mm)	
Inch	DN	mm	L1	L2
12" × 6"	300 × 150	323.9 × 165.1	400	325
12" × 8"	300 × 200	323.9 × 219.1	400	350
14" × 4"	350 × 100	355.6 × 114.3	425	325
14" × 6"	350 × 150	355.6 × 165.1	425	325
14" × 8"	350 × 200	355.6 × 219.1	425	325
14" × 12"	350 × 300	355.6 × 323.9	425	425
16" × 4"	400 × 100	406.4 × 114.3	450	350
16" × 6"	400 × 150	406.4 × 165.1	450	350
16" × 8"	400 × 200	406.4 × 219.1	450	350
16" × 12"	400 × 300	406.4 × 323.9	450	450
18" × 4"	450 × 100	457.2 × 114.3	475	375
18" × 6"	450 × 150	457.2 × 165.1	475	375
18" × 8"	450 × 200	457.2 × 219.1	475	375
18" × 12"	450 × 300	457.2 × 323.9	475	475
18" × 16"	450 × 400	457.2 × 406.4	475	475
20" × 4"	500 × 100	508.0 × 114.3	500	400
20" × 6"	500 × 150	508.0 × 165.1	500	400
20" × 8"	500 × 200	508.0 × 219.1	500	400
20" × 12"	500 × 300	508.0 × 323.9	500	500
20" × 16"	500 × 400	508.0 × 406.4	500	500
24" × 6"	600 × 150	609.6 × 165.1	550	450
24" × 8"	600 × 200	609.6 × 219.1	550	450
24" × 12"	600 × 300	609.6 × 323.9	550	550
24" × 16"	600 × 400	609.6 × 406.4	550	550